



Brushless Pen Nail Drill



JMD-119

NAIL DRILL SYSTEM

- 0 On/Off
- 8 Type-C Mount
- 0 Speed Display
- 0 Forward/Reverse
- 0 Increase Speed
- 0 Decrease Speed
- 0 Pause
- 0 OEM Logo
- 0 Nail Drill Bit

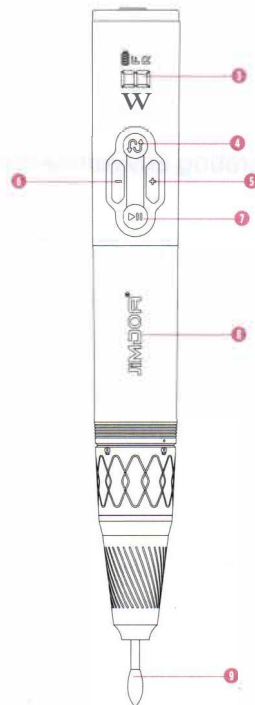

SPECIFICATION

- | | |
|--------------------------------|------------------------|
| 1.Power:1 OW | 4.Weight:126g |
| 2.Input Voltage:DC:'5V= 2A | 5.Dimension :180*22 mm |
| 3.Battery Capacity:7.4V 320mAH | 6.Speed :0-35000RPM |


PACKING LIST

- | | |
|------------------------------|-----------------|
| 1* Brush less Pen Nail Drill | 1* Type-C Cable |
| 1* Nail Drill Bits | 1* User Manual |


SET DRILL BITS




(D)Turn left side clockwise until you hear it click into the place



Q)Take out the original bit



G)Insert the 3/32"size bit



@Turn right side anti-clockwise to lock the bit tightly

PRECAUTION

- 1.Do NOT disassemble the hand piece.
- 2.Do NOT drop the handpiece.
- 3.Do not work in a humid environment.
- 4.Operating Environment Humidity: 30%-75%.
- 5.Operating Environment Temperature: +10°C~26°C.
- 6.Turn off the power when changing the bits.

OPERATION STEPS

- 1.When you turn On/Off button, the nail drill enter into the standby state.
- 2.When you press" +" or" -" , the speed will adjust from 00-35 (RPM*1 000)or 35-00(RPM*1 000),you can adjust to the desired speed.
3. When you press" ⏸ " button to adjust forward and reverse.
- 4.When you press ' ⏸ ' button,the handpiece enters the pause state. Press the pause button again to release the pause.
- 5.If the battery is running o_u_t of power,please charge it in time.Please pay attention that you should charge it with 5V=2A power adapter,otherwise it will cause the nail drill breakdown.